



Republic of the Philippines  
**GENERAL SANTOS CITY WATER DISTRICT**  
 E. Fernandez Street, Barangay Lagao General Santos  
 Telephone No.: 552-3824; Telefax No.: 553-4960  
 Email Address: gscwdprocurement@yahoo.com

GPM-014-4

**REQUEST FOR QUOTATION**

RFQ #: 3-0724-082      DATE: 7/24/2024

SUPPLIER: \_\_\_\_\_  
 ADDRESS: \_\_\_\_\_  
 TELEPHONE NO. : \_\_\_\_\_  
 TIN NO. : \_\_\_\_\_

Dear Sir/Madam,

Pls. quote your lowest price on the item/s listed below subject to general condition stating the shortest time of delivery and submit your quotation duly signed by your representative not later than 7/28/2024, Pls. furnish this office the following articles subject to the terms and conditions contained therein.

Instructions :

1. Accomplish this Request for Quotation duly, correctly, and completely.
2. Do not alter the contents of this form in any way.
3. If Technical Specifications/ Terms of Reference is provided, prospect bidder (supplier / service provider) must indicate and signify compliance to every parameter in the specification.

ITEM NO.	DESCRIPTION	QTY.	UNIT	UNIT PRICE
1	INSULATION PRIMARY LINE COVER CONDUCTOR : SEE ATTACHED SPECIFICATION-ABC: PHP 260,000.00 ##### nothing follows #####	40	pc	P

Date of Delivery: \_\_\_\_\_  
 Price Validity : \_\_\_\_\_  
 Mode of Payment: \_\_\_\_\_

Place of Delivery: GSCWD Bodega  
 \*\*\*\*\*No partial delivery allowed\*\*\*\*\*  
 Note: 6% WITHHOLDING TAX DEDUCTION  
 PR NO.: 0724-024

Requested by:

ANDREW H. NACAL, JR.  
 Material Procurement Officer

Price quoted by:

\_\_\_\_\_  
 Supplier

\_\_\_\_\_  
 Date




**TECHNICAL SPECIFICATION**

**TITLE: PURCHASE OF BRAND-NEW INSULATION PRIMARY LINE COVER CONDUCTOR**

**1.0 SCOPE OF CONTRACT**

The scope shall be supply of Insulation Primary Line Cover Conductor to General Santos City Water District (GSCWD).

**INSULATION PRIMARY LINE COVER CONDUCTOR**

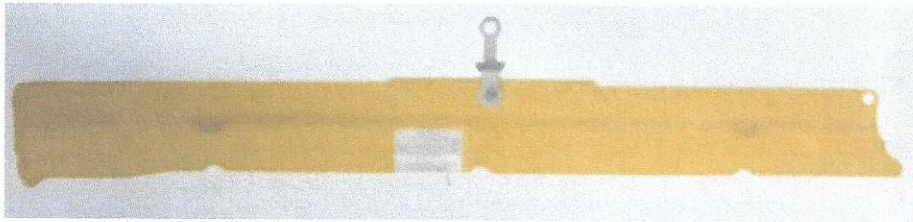

<b>Requirements</b>	<b>Statement of Compliance</b>
<b>Design tested to voltage rating: 13.8kV to 15kV</b>	
<b>Length: 6ft (1.83m)</b>	
<b>Made from yellow polyethylene</b>	
<b>With hotstick handle included</b>	
<b>With grip-all adapter</b>	
<b>Flame Retardant: (meets UL94 V-0 rating)</b>	
<b>Operating Temperature Range: -40°C to +85°C for insulating cover; -40°C to +90°C for hot stick</b>	
<b>Melting Point (Insulating Cover): 120°C to 160°C (for polyethylene)</b>	
<b>Moisture Absorption: Less than 0.01% (24 hours at 23°C) for insulating cover; Less than 0.2% for hot stick</b>	
<b>Weather Resistance: UV stabilized to prevent degradation under sunlight for both insulating cover and hot stick</b>	
<b>2 years warranty</b>	

Prepared by:

**EDMUND L. BADAL, REE**  
End User