



Republic of the Philippines
GENERAL SANTOS CITY WATER DISTRICT
 E. Fernandez Street, Barangay Lagao General Santos
 Telephone No.: 552-3824; Telefax No.: 553-4960
 Email Address: gscwdprocurement@yahoo.com

GPM-014-2

REQUEST FOR QUOTATION

RFQ #: 3-0922-075 DATE: 09/28/2022

SUPPLIER: _____
 ADDRESS: _____
 TELEPHONE NO. : _____
 TIN NO. : _____

Dear Sir/Madam,

Pls. quote your lowest price on the item/s listed below subject to general condition stating the shortest time of delivery and submit your quotation duly signed by your representative not later than 10/04/2022, Pls. furnish this office the following articles subject to the terms and conditions contained therein.

ITEM NO.	DESCRIPTION	QTY.	UNIT	UNIT PRICE
1	LABOR & EQUIPMENT- PULL-OUT & HANDLING OF ELEVATED STEEL TANK : AGAN HOMESP1-P3, BRGY. SAN ISIDRO-ABC: PHP 74,800.00 ##### nothing follows #####	1	LOT	P

Date of Delivery: _____
 Price Validity : _____
 Terms of Payment: _____

Place of Delivery: GSCWD Bodega
 *****No partial delivery allowed*****
 Note: 6% WITHHOLDING TAX DEDUCTION
 OR NO.: 0922-034

Requested by:

GESEM R. CABAÑERO
 MATERIAL PROCUREMENT OFFICER A

Price quoted by:

 Supplier

 Date



Republic of the Philippines
GENERAL SANTOS CITY WATER DISTRICT
E. Fernandez Street (Emergency Road, Lagao, General Santos City
Telephone No. 552-3824-554-7231; Telefax No. : 553-4960
E-mail : gscwaterdistrict@yahoo.com

SCOPE OF WORK

Project Title: **Pull-Out and Handling of Elevated Steel Tank**

Location: **Agan Homes P1 to P3, Brgy. San Isidro, General Santos City**

The work consist of the following:

1. The Contractor shall inspect the site of the work in order to satisfy themselves by personal examination and/or by such other means as they may prefer, of the location of the proposed work and the visualization of the work to be done.
2. Demolish/Dismantle the existing elevated steel tank with less damage to the structure.
3. Loading and hauling of dismantled materials from the place origin to the area designated by the authorized Owner representative.
4. All works shall be done in a safe manner to avoid unnecessary loss of life and damage to property.
5. Contractor shall provide safety equipment, gadgets, barricades, safety signboards, and other devices as necessary to prevent accident, damage or injury to the public.
6. A qualified superintendent shall be present in the work and shall provide competent supervision of the work until its completion.
7. The employees of the Contractor are not employees of the Owner. Hence, the Owner shall not be liable or responsible for any personal injury or damage including death cause by any of the employees of the Contractor during the lawful performances of their duties.
8. The procurement and payment of all necessary permits in the project implementation shall be the responsibility of the Owner.
9. Pull-out/Turn-over materials form shall be properly filled-out by the contractor prior to endorsement to GSCWD warehouse personnel.


Prepared by:


DANILO M. HORLADOR JR., CE
MERCWD-Resident Engineer

Recommending Approval by:


ROGELIO A. BESANA, JR., CE/RMP
AGM-Operations & Technical Services

Checked by:


MA. CELIA N. DANDAN, CE
MERCWD-Division Manager A

Approved by:


ARN B. GELLANGARIN, PME
General Manager



Republic of the Philippines
GENERAL SANTOS CITY WATER DISTRICT

E. Fernandez St. Lagao, General Santos City
Telephone No. (083) 552-3824/ Telefax No. (083) 553-4960
E-mail Address: gscwaterdistrict@yahoo.com



Project: **PULL-OUT AND HANDLING OF ELEVATED STEEL TANK**
Location: **AGAN HOMES, P1 to P3, BRGY. SAN ISIDRO, GENERAL SANTOS CITY**
Owner: **GENERAL SANTOS CITY WATER DISTRICT**
Subject: **LIST OF PULL-OUT MATERIALS / TURN-OVER TO GSCWD WAREHOUSE**

NO.	DESCRIPTION	QUANTITY	UNIT	LENGTH (per piece)
1.	Tank Shell including Railings			
2.	20mmØ Plain Round Bar Diagonal Bracing			
3.	20mmØ Plain Round Bar Horizontal Bracing Pipe Support			
4.	20mmØ Turnbuckle			
5.	6"Ø Steel Pipe, Tank Column			
6.	4"Ø Steel Pipe, Supply & Drain Pipe			
7.	2½" x ¼" thk. Angle Bar, Horizontal Bracing			
8.	350mm x 350mm x 6mm thk. Base Plate			

Submitted by: _____
Name of Contractor Representative: _____
Position: _____
Name of Contractor: _____



Republic of the Philippines
GENERAL SANTOS CITY WATER DISTRICT

E. Fernandez St. Lagao, General Santos City
Telephone No. (083) 552-3824/ Telefax No. (083) 553-4960
E-mail Address: gscwaterdistrict@yahoo.com



Project: **PULL-OUT AND HANDLING OF ELEVATED STEEL TANK**
Location: **AGAN HOMES, P1 to P3, BRGY. SAN ISIDRO, GENERAL SANTOS CITY**
Owner: **GENERAL SANTOS CITY WATER DISTRICT**
Subject: **BILL OF QUANTITIES / SCOPE OF WORKS**

ITEM NO.	DESCRIPTION	QUANTITY	UNIT	UNIT COST	AMOUNT
A1.	Pull-out of Existing Elevated Steel Tank	1.00	lot		
	a. <i>Shall inspect the site of the work in order to satisfy themselves by personal examination and/or by such other means as they may prefer the location of the proposed work and the visualization of the work to be done.</i>				
	b. <i>Demolish/Dismantle the existing elevated steel tank with less damage to the structure.</i>				
	c. <i>Loading and Hauling of Dismantled materials from the place of origin to the area designated by GSCWD Representative.</i>				
	d. <i>Furnishing and Installation of Safety Equipment, Gadgets, Barricades, safety signages and other devices as necessary to prevent accident, damage or injury to the public.</i>				
TOTAL PROJECT COST					

NOTE:

PLEASE REFER TO APPROVED PLANS FOR FURTHER DETAILS

Submitted by: _____


Name of Bidder representative: _____

Position: _____

Name of Bidder: _____



VICINITY MAP
SCALE: NTS

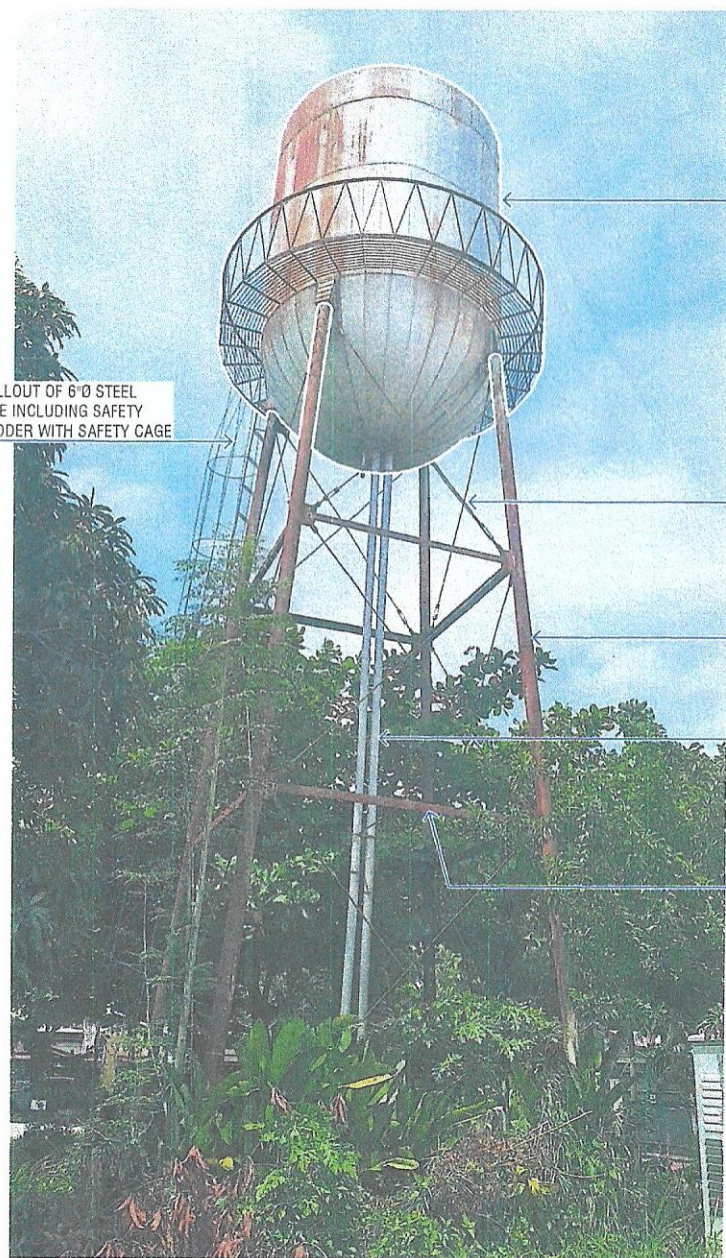

EXISTING ELEVATED STEEL TANK
SCALE: NTS

PULLOUT OF TANK SHELL AND RAILINGS ASSEMBLY

PULLOUT OF 6"Ø STEEL PIPE INCLUDING SAFETY LADDER WITH SAFETY CAGE

PULLOUT OF 24pcs - 20mmØ PRB DIAGONAL BRACING W/ TURNBUCKLE

PULLOUT OF 4pcs - 6"Ø STEEL PIPE INCLUDING 6mm thk. BASE PLATE

PULLOUT OF 2pcs - 4"Ø STEEL PIPE INCLUDING 20mmØ PRB PIPE SUPPORT

PULLOUT OF 8pcs - 2½" x ¼" ANGLE BAR HORIZONTAL BRACING

GENERAL SANTOS CITY WATER DISTRICT
E. FERNANDEZ STREET, BRGY. LAGAO, GEN. SANTOS CITY
ENGINEERING & CONSTRUCTION DEPARTMENT
PLANNING AND DESIGN DIVISION
TEL. NO.: (083) 552 - 3824

PROJECT TITLE / LOCATION:
PULLOUT & HANDLING OF EXISTING ELEVATED STEEL TANK
AGAN HOMES, BRGY. SAN ISIDRO, GENERAL SANTOS CITY

CHECKED & REVIEWED BY:

ENGR. MARIA CELIA N. DANDAN
OIC - Planning & Design Division

APPROVED BY:

ENGR. ROGELIO A. BESANA, JR.
AGM - Operations & Technical Services

CONTENT:
AS SHOWN
DRAWN: JEUNG REVISION:
CHECKED: MCND DATE: 08 / 22 / 2022

SHEET NO.:
1