



TECHNICAL SPECIFICATION

TITLE:

PURCHASE OF ONE (1) UNIT BRAND NEW MULTI-PURPOSE VEHICLE
 WITH BACKHOE LOADER

C. SCOPE OF CONTRACT

The scope of work shall be supply and delivery of One (1) unit Brand New Multi-purpose Vehicle with Backhoe Loader to General Santos City Water District.

D. TECHNICAL SPECIFICATIONS:

MODEL	
DRIVE SYSTEM	<ul style="list-style-type: none"> - Servo controlled Axial Piston Variable displacement Double Pumps driving radial piston, Multi-stroke hydraulic motors enabling forward and reverse motion - Service Brake is provided by Hydraulic Driving System - Spring on, hydraulic pressure off park brake system - Travel speeds 0-12 km/hr forward & reverse
GROSS VEHICLE WEIGHT	<ul style="list-style-type: none"> - Operating weight with standard equipment : 3800 kg - Operating weight (include machine equipped with 420 mm backhoe bucket, shovel without forks, with 75 kg operator weight and full fuel tank
PAYLOAD (kg)	
CAB AND HOOD	<ul style="list-style-type: none"> - Ergonomic & Esthetic Interior Design provides max. Space - Wide Visual Angle - Full Rops/ Fobs cab with sound proofing - Two joysticks for all controls ergonomically mounted on seat - Air conditioner - Multi-functional Seat with Seatbelt - Easy to read full color LCD display - Ergonomic & Elegant hand & foot Throttle - Battery Isolator - Ease of service maintenance - Well protected fuse box inside the operator cab
TRANSMISSION	
TIRES: FRONT REAR	10 x 16.5 10 Pr Skz 10 x 16.5 10 Pr Skz
FUEL TANK CAPACITY (L)	
ENGINE:	<ul style="list-style-type: none"> - High power and torque output, water cooled turbocharged diesel engine - Compatible with USA EPA Tier 3 Interim European ELJ Stage III-A exhaust gas emission regulations
EMISSION STANDARD	
TYPE	Diesel Engine, 4 In-line
COOLING SYSTEM	Liquid



FUEL INJECTION SYSTEM	
DISPLACEMENT (cc) BORE x STROKE (mm)	2434 (87 x 102.4)
PERFORMANCE:	
MAX. POWER (ps/rpm, kW/rpm)	44 kW , 59 Hp / 2700 rpm
MAX. TORQUE (kgf. m/rpm, Nm/rpm)	160 Nm / 1600 rpm
COMPRESSION RATIO	
HYDRAULIC SYSTEM:	
MAIN PUMP FLOW	61 L/min, 2700 rpm
PRESSURE	220 bar
TRAVEL PUMP FLOW	243 L/min, 2700 rpm
PRESSURE	400 bar
CONTROLS	- Ergonomic servo controlled joysticks mounted on the seat control driving and front loading operation. Same joysticks also control backhoe operation when the operator seat is turned to backhoe side

Terms and Conditions:

- I. The winning bidder shall secure one (1) year comprehensive insurance from the Government Service Insurance System (GSIS) with the inclusion of Acts of Nature (AON), theft and on damage.
- II. The winning bidder shall provide Three (3) years or One Hundred Thousand (100,000) kilometres warranty whichever comes first on the vehicle unit and its accessories. Warranty period shall commence from the date of final acceptance.
- III. Labor and consumables (e.g. oil and filters) on the first preventive maintenance shall be shouldered by the winning bidder and labor only on the succeeding years of the warranty period.
- IV. Markings on the vehicle body particularly the GSCWD official logo, "General Santos City Water District" and "for official use only" shall be provided by the winning bidder.
- V. The winning bidder shall provide two (2) sets of early warning device (as per LTO standard), one (1) unit spare tire, one (1) unit hydraulic jack and one (1) unit tire wrench.
- VI. The vehicle unit shall be delivered to GSCWD office and shall be within the period of Ninety (90) calendar days from the date of receipt of Purchase Order (PO).




Republic of the Philippines
GENERAL SANTOS CITY WATER DISTRICT
E. Fernandez St., Brgy. Lagao, General Santos City
Telephone No. (083) 552-3824; Telefax No. 553-4960
www.gensanwater.gov.ph



Prepared by:


TECHNICAL WORKING GROUP FOR VEHICLE AND MECHANICAL WORKS:


Darwin Dave D. Sarsale, ME
TWG-Member

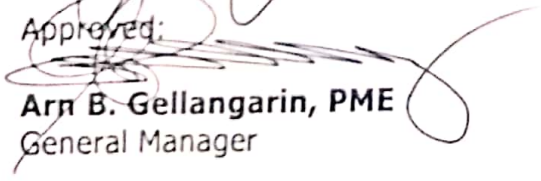

Dluanie Enerio, ME
TWG-Member


Michael G. Gabales, REE
TWG-Head

Recommending Approval:


Ferdinand S. Ferrer, MPA
Assistant General Manager – Administration

Approved:


Arn B. Gellangarin, PME
General Manager